
www.cementation-navigation.com Generated on: 26.04.2025



Used Products

SpeedCEM Plus

TOOTH - Bridge - Oxide ceramics - Retentive preparation - Super- and equigingival - Non-visible margin - SpeedCEM Plus

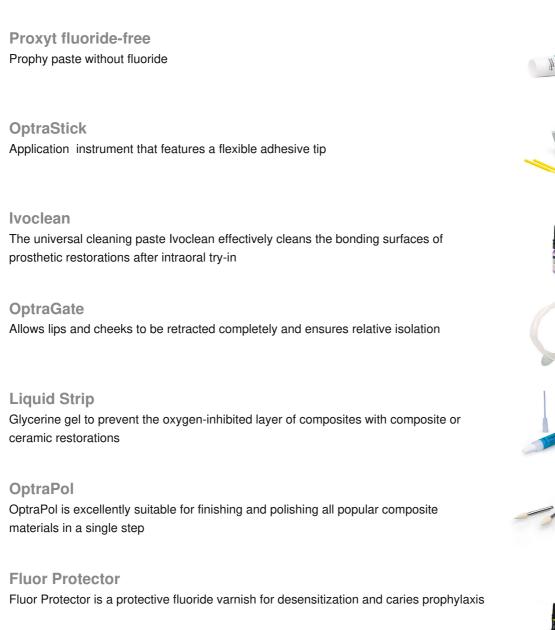

 \square

The self-adhesive, self-curing resin cement with light-curing option



















Flowchart SpeedCEM Plus

TOOTH - Bridge - Oxide ceramics - Retentive preparation - Super- and equigingival - Non-visible margin - SpeedCEM Plus





The temporary is removed. If necessary, any leftover temporary cement is removed from the preparation with a polishing brush and cleaning paste free of oil and fluoride (e.g. Proxyt fluoride-free). Subsequently, the preparation is dried with moisture-free and oil-free air.



The restoration is tried in



The permanent restoration is tried in. At this stage, the shade, accuracy of fit and occlusion of the restoration are checked.

The restoration is pretreated



The inner surfaces of the restoration are sandblasted (e.g. IPS e.max ZirCAD, 1 bar, Al₂O₃ 100 µm or as directed by the manufacturer of the restorative materials).

2




The preparation is isolated and cleaned



The preparation is cleaned with a polishing brush and moisture-free and fluoride-free cleaning paste (e.g. **Proxyt fluoride-free**). Then it is rinsed with water spray. Subsequently, it is dried with air free of oil and moisture. Overdrying must be avoided.

SpeedCEM Plus is applied



SpeedCEM Plus is dispensed from the automix syringe and the desired amount is directly applied to the bonding surface of the restoration.

The restoration is seated and excess cement is removed



The restoration is seated and held in place using light constant pressure.



Excess cement is light-cured with a polymerization unit (circa 650 mW/cm²) for 1 second per quarter surface (mesio-oral, disto-oral, mesio-buccal, disto-buccal) at a distance of approx 0-10 mm.

Ivoclar Vivadent AG, Bendererstrasse 2, FL-9494 Schaan, Liechtenstein www.ivoclarvivadent.com, Phone +4232353535, Fax +4232353360 Please observe the respective Instructions for Use.





The gel-like excess material can be easily removed with a scaler.



Like all composites, **SpeedCEM Plus** is subject to oxygen inhibition. In order to avoid this problem, it is advisable to cover the restoration margins with glycerine gel/air block (e.g **Liquid Strip**) immediately after the removal of excess cement.



Subsequently all the cement margins are light cured for another 20 seconds (approx. 1,100 mW/cm²). Materials that are opaque, in other words, impervious to light, should be allowed to self-cure.



Liquid Strip is rinsed off and where required OptraGate or the absorbent pads and retraction cords are removed.









Proximal areas are adjusted with finishers and polishers. The occlusion and functional movements are checked and adjusted if necessary. The restoration margins are polished with polishers (**OptraPol**) or discs.

The teeth are fluoridated



A thin film of **Fluor Protector** is applied with a Vivabrush or brush and distributed evenly. The varnish is dried with an air syringe.

